


STREAMO

MARINE FLOORINGS FOR SHIP INTERIORS



MARINER / MARINER SD



Gerflor[®]

STREAMO MARINER / MARINER SD

STREAMO MARINER

18 COLORS
Directional design

For medium to heavy duty traffic areas

Flexible flooring, easy to install & weld

PUR TREATED Ease of maintenance
no immediate waxing after installation, except in heavy traffic areas

STREAMO MARINER SD

ESD Dissipative, antistatic homogeneous floorcovering, for technical areas such as electronics and telecommunication spaces, computer rooms, medical centers, etc.

6 COLORS
Directional design



Compliant with IMO regulations



Indoor air quality :
TVOC 100 times below standard
(TVOC < 10 µg/m³ after 28 days)



100% REACH compliant
Free of formaldehyde,
free of heavy metals, free of solvent



0112 Storm available in **SD** only



0010 Azure



0126 Nordica



0127 Bermuda



0306 Green available in **SD** only



0120 Borneo



0121 Green Leaf



0122 Pineapple

STREAMO MARINER

2 m | 608 x 608 mm | PUR treated | 100% recyclable



0003 Ivory



SD 0014 Brown



0006 Honey



0016 Sand



0123 Corallo



0124 Tortora




0125 Truffle



0108 Pepper



Finnlines

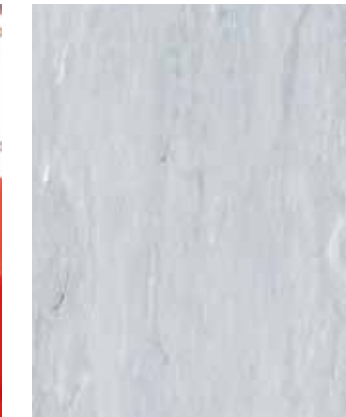

0002 Platinum **SD**



0005 Steel **SD**



0303 Grey



0013 Pewter **SD**

STREAMO MARINER SD

2 m | 608 x 608 mm | 100% recyclable | $10^6 \leq R_t \leq 10^8 \Omega$ (EN 1081)

SD: color also available in SD version (Tiles & sheets).



STREAMO MARINER / MARINER SD

PUR surface treatment
(Streamo Mariner only)

Monolayer homogeneous
calendered flooring



INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available upon request.

	STREAMO MARINER	STREAMO MARINER SD	
DESCRIPTION / DESCRIPTION / BESCHREIBUNG / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE			
Total thickness / <i>Épaisseur totale</i> / Gesamtdicke / <i>Espesor total</i> / <i>Espezzura total</i> / <i>Spessore totale</i>	EN ISO 24346	mm 2.0 2.0	
Weight / <i>Poids</i> / Gewicht / <i>Peso</i> / <i>Peso</i> / <i>Peso</i>	EN ISO 23997	g/m ² 3300 3300	
Width/length of sheet / <i>Largeur/longueur des lés</i> / Rollenbreite/Rollenlänge / <i>Ancho/largo de rollos</i> / <i>Largura/comprimento dos rolos</i> / <i>Larghezza/lunghezza dei teli</i>	EN ISO 24341	cm/lm 200/20 200/20	
Tile size / <i>Format dalles</i> / Format Fliesen / <i>Dimensiones de las losetas</i> / <i>Dimensões dos mosaicos</i> / <i>Dimensione delle piastre</i>	EN ISO 24342	mm 300 x 300* 608 x 608 608 x 608	
Number of tiles per package / <i>Nombre de dalles par boîte</i> / Fliesenanzahl pro Karton / <i>Cantidad de losetas/caja</i> / <i>Quantidade dos mosaicos/caixa</i> / <i>N° piastre per confezione</i>	-	- 50 20 20	
Sqm/Box - <i>m²/boîte</i> - Qm pro Karton/m ² - <i>Bulto/m²</i> - <i>Caixa/m²</i> - <i>Confezione</i>	-	- 4.5 7.39 7.39	
CLASSIFICATION / CLASSIFICATION / KLASSIFIZIERUNG / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI			
Norm/product specification / <i>Norme produit</i> / Produkt Norm / <i>Normas</i> / <i>Normas</i> / <i>Norma prodotto</i>	-	- EN ISO 10581	
Fire rating / <i>Classement feu</i> / Brandverhalten / <i>Fuego</i> / <i>Fogo</i> / <i>Reazione al fuoco</i>	IMO Resolution	- MSC 307 (88) Part 5 MSC 307 (88) Part 2	
	Maritime Approvals	-	Marine Equipment Directive US Coast Guard Transport Canada SOLAS 74
		EN 1815	kV < 2 < 2
		EN 1081 ⁽¹⁾	Ω - 10 ⁴ ≤ Rt ≤ 10 ⁹
		PERFORMANCE / PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE	
Wet Slip resistance / <i>Anti-glissance à l'humide</i> / Rutschverhalten bei Nässe / <i>Resistencia de deslizamiento en mojado</i> / <i>Antideslizamento condições no molhado</i> / <i>Indice di antiscivolosità con superficie bagnata</i>	EN 16165 App B (DIN 51130)	class R9	
Type Binder content / <i>Teneur en agent liant</i> / Bindenmittelgehalt	ISO 10581	type II	
Dimensional stability / <i>Stabilité dimensionnelle</i> / Maßstabilität / <i>Estabilidad dimensional</i> / <i>Estabilidade dimensional</i> / <i>Stabilità dimensionale</i>	EN ISO 2399	% Sheet ≤ 0.40 Tile ≤ 0.25	
Residual indentation / <i>Poinçonnement statique rémanent</i> / Resteindruck / <i>Punzonamiento</i> / <i>Punçoamento</i> / <i>Impronta</i>	EN ISO 24343-1	mm ~ 0.03	
Thermal conductivity / <i>Conductivité thermique</i> / Wärmeleitfähigkeit / <i>Resistencia térmica</i> / <i>Resistência térmica</i> / <i>Resistenza termica</i>	EN ISO 10456	W/(m.K) 0.25	
Colour fastness / <i>Solidité lumière</i> / Lichtechtheit / <i>Resistencia a la luz</i> / <i>Estabilidade das cores</i> / <i>Solidità alla luce</i>	EN 20 105 - B02	degree ≥ 6	
Chemical resistance / <i>Résistance aux produits chimiques</i> / Verhalten gegenüber Chemikalien / <i>Resistencia a los productos químicos</i> / <i>Resistência aos produtos químicos</i> / <i>Resistenza ai prodotti chimici</i>	EN ISO 26987	- OK	
Surface treatment / <i>Traitement de surface</i> / Oberflächenvergütung / <i>Tratamiento de superficie</i> / <i>Tratamento de superfície</i> / <i>Traitamento di superficie</i>	-	- PUR -	
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days / <i>TVOC après 28 jours</i> / TVOC (28 Tage) / <i>TVOC (28 dias)</i> / <i>TVOC (28 dias)</i> / <i>TVOC (28 giorni)</i>	ISO 16000-6	µg/m ³ < 10	
Certification / Zertifikat / Certificado / Certificazione	-	- Floorscore®	

* Upon special request (2000 sqm MOQ) (1) Measured before installation

Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Skirtings & Profiles



IMO adhesive



IMPORTANT:

The information contained in this document is valid from 01/02/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

43, Boulevard Robert Michon
69170 Tarare - France
Tel.: +33 4 74 05 40 00
Fax: +33 4 74 05 06 83
Email: streamo@gerflor.com
www.streamobygerflor.com

Gerflor®